

DISINFECTING HARD AND SOFT SURFACES USING A FOGGING MACHINE

The spread of COVID-19 across the globe has everyone working hard to disinfect buildings and public spaces. The use of a fogging machine is an effective way to disinfect hard and soft surfaces in mass. According to the EPA Emerging Pathogen Policy, State has a number of disinfecting products that can be used through a fogging machine to help combat the spread of COVID-19.

Personal protective equipment (PPE) must be worn while fogging any space. This includes gloves, safety glasses and a respirator.

The following State products can be used through a fogging machine with these instructions.



Triple Quick™

- PPE: Gloves, safety glasses, respirator.
- No dilution necessary. Pour Triple Quick into reservoir.
- Hold fogger six to eight inches from surface to be treated.
- Spray area until it is covered with the mist.
- Allow surface to remain wet for 2 mins.
- Let air dry.
- Do not enter room or building within two hours of the actual fogging and a minimum of 4 air exchanges (ACH) per hour in the facility.




Quick Defense™ NDC™ (US only)

- PPE: Gloves, safety glasses, respirator.
- Dilute 1 ounce per gallon of water. Add solution to reservoir.
- Hold fogger six to eight inches from surface to be treated.
- Spray area until it is covered with the mist.
- Remove excess liquid.
- Do not enter a room or building within two hours of the actual fogging and a minimum of 4 air exchanges (ACH) per hour in the facility.



NDC™

- PPE: Gloves, safety glasses, respirator.
- Dilute 2 ounces per gallon of water. Add solution to reservoir.
- Hold fogger six to eight inches from surface to be treated.
- Spray area until it is covered with the mist.
- Remove excess liquid.
- Do not enter a room or building within two hours of the actual fogging and a minimum of 4 air exchanges (ACH) per hour in the facility.

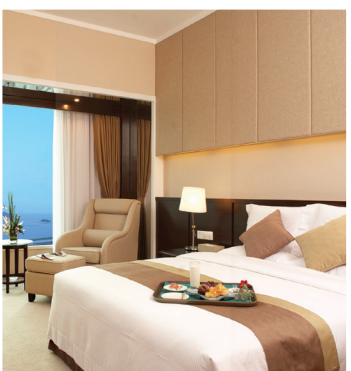



Ecolution[®] Disinfectant (US only, excluding California)

- PPE: Gloves, safety glasses, respirator.
- Dilute 2 ounces per gallon of water. Add solution to reservoir.
- Hold fogger six to eight inches from surface to be treated.
- Spray area until it is covered with the mist.
- Treated surfaces must remain wet for 10 minutes.
- Let air dry. Do not enter a room or building within two hours of the actual fogging and a minimum of 4 air exchanges (ACH) per hour in the facility.



F-362[™] No Rinse (California and Canada only)

- PPE: Gloves, safety glasses, respirator.
- Dilute 2 ounces per gallon of water. Add solution to reservoir.
- Hold fogger six to eight inches from surface to be treated.
- Spray area until it is covered with the mist.
- Treated surfaces must remain wet for 10 minutes.
- Let air dry. Do not enter a room or building within two hours of the actual fogging and a minimum of 4 air exchanges (ACH) per hour in the facility.